

BIG GIÒ design Giò Colonna Romano





Vaso

Anno di produzione: 2004

Versioni: standard, luminosa, laccata.

Materiali: Polietilene.

Dimensioni: Ø 145 h 143 cm

Peso: 55 Kg Capacità: 1250 L

Imballaggio: 150 x 150 x 148 cm Volume imballaggio: 3,6 m³

Note: imballaggio senza scatola.

Vase

Année de production: 2004

Versions: standard, lumineuse, laquée.

Matériaux: Polyéthilène.

Dimensions: Ø 145 h 143 cm

Poids: 55 Kg Capacité: 1250 L

Emballage: 150 x 150 x 148 cm Volume emballage: 3,6 m³

Note: pas de boîte d'emballage.

Pot

Year of production: 2004

Versions: matt, lighting, lacquered.


Material: Polyethylene.

Dimensions: Ø 145 h 143 cm

Weight: 55 Kg Capacity: 1250 L

Packaging: 150 x 150 x 148 cm Packaging volume: 3,6 m³

Note: no box packaging.

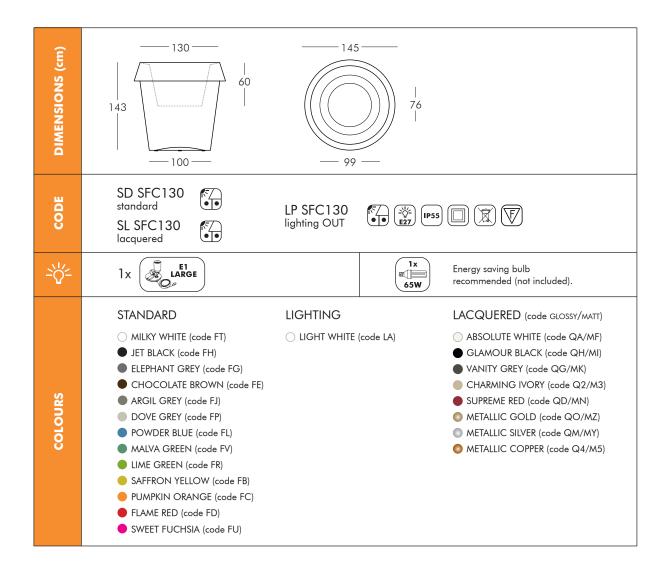

SYMBOLS



For indoor use.



Stackable item.



Conformity to the European Community



100% recyclable polyethylene.



Recycling and disposal of electronic waste (WEEE).



Outdoor version on request (IP55).



European Community registered model.

LIGHTING SYMBOLS

 $For indoor \ and \ outdoor \ use.$



Protected against the intrusion of solid objects $\emptyset > 12$ mm, not against water.



Standard lamp base for E27 - 27 mm light bulb.



RGB lighting system.



Protected against the intrusion of solid objects $\emptyset > 1$ mm and splashing water.



Lamp base for G4 halogen bulb.



Item compatible with Candy Light.



Protected against the intrusion of dust and water jets.



Lamp base for GU10 spotlight.



Insulation class 1.



Fully protected against the intrusion of dust and immersion in water.



Lamp base for G13 neon tube.



Insulation class 2.



Small lamp base for E14 - 14 mm light bulb.



Neon tube lighting system.



Insulation class 3.



Medium lamp base for E26 - 26 mm light bulb.



LED technology lighting system.



Device proper to direct assembly onto normally inflammable surfaces.



Lighting through energy saving bulb.

The upper figure shows the number of allowed bulbs.

The lower figure shows the MAXIMUM recommended power.



Lighting through energy saving fluorescent spotlight.

The upper figure shows the number of allowed spotlights.

The lower figure shows the MAXIMUM recommended power.



Lighting through neon tube.

The upper figure shows the number of allowed neon tubes.
The lower figure shows the MAXIMUM recommended power.



Lighting through energy saving globe bulb.

The upper figure shows the number of allowed bulbs.

The lower figure shows the MAXIMUM recommended power.



Lighting through flexible LED tube.

The lower figure shows the MAXIMUM recommended power.



Lighting through circular T9 neon tube.

The upper figure shows the number of allowed neon tubes.

The lower figure shows the MAXIMUM recommended power.

WIRING SYMBOLS



Wiring with metal clamp. IP20 protection. Diameter 11 cm.



Wiring with special base for KIT LED 3 WATT.

IP55 protection.

Diameter 11,6 cm.



Wiring with metal base.

IP55 protection.

Diameter 10 cm. Fastening by hex screw key.



Wiring with plastic screw base.

13 - IP20 protection. E3 - IP55 protection.

Diameter 6 cm.



Wiring with metal base. IP55 protection.

Diameter 20 cm. Fastening by hex screw key.



Wiring with plastic screw base.

13 - IP20 protection. E3 - IP55 protection.

Diameter 10 cm.



Wiring with plastic base and metal inserts.

12 - IP20 protection. E2 - IP55 protection.

Diameter 10 cm. Fastening by slot screwdriver.



Wiring with plastic screw base.
13 - IP20 protection. E3 - IP55 protection.
Diameter 15 cm.



Wiring with plastic base and LED CANDY LIGHT. IP44 protection.
Diameter 10 cm.



Special metal base. IP20 protection. Several sizes.

MATERIAL PROPERTIES

Material: Polyurethane - PU

Production process: injection molding

High durability

Very good thermal resistance Material is 100% recyclable

WARNING

- Keep away from excessive heat sources.
- Avoid any improper use. Do not stand on the products. When the product has to be moved, lift the product off the ground in order to avoid damage.
- Carefully comply with the maintenance & cleaning instructions.
- Slight differences in shade may be present between the various elements, and, in case of products purchased at different times, the time lapse and climatic-natural factors may cause variations in colour and/or shade, without compromising the structure.
- The afore-mentioned differences are not grounds for claims and/or the return of goods.

MAINTENANCE & CLEANING

- To prevent dust and dirt from sticking to the plastic surfaces, periodically clean the products with a soft cloth and neutral liquid soap diluted in water, especially if the surface comes into contact with higly coloured substances (such as coffee, oil, etc.).
- Avoid using ethanol or any liquids containing, even in small amounts, acetone, trichloroethylene or ammonia (solvents in general).
- Avoid rubbing the lacquered surface.
- For metal parts use specific cleaners, avoiding the use of abrasive powders and flakes that could scratch the surface.

SUSTAINABILITY & RECYCLING

All SLIDE products are 100% recyclable. SLIDE has a closed production cycle with no health prejudicial emissions and complying with ecological sustainibility rules.

When a product reaches the end of its life, do not treat the product or any of its parts as domestic waste. Dispose by sending to differentiated collection centres.

RESPONSIBILITY & RETURNS

SLIDE declines any liability to damages caused to things or persons by an illegitimate use of the product. SLIDE won't accept any returned goods without having checked the kind of defects first.

WARRANTY

SLIDE products are guaranteed against all manufacturing faults, granted that the items are appropriately used, for twenty-four (24) months from the date of purchase upon presentation of the invoice.

LED KITS only are guaranteed for twelve (12) months from the date of purchase.

Warranty doesn't include parts that are subject to wear and tear due to usage, batteries when provided, wiring and electrical parts that do not have manufacturing faults.

