


RIFLESSO

Design Chiaramonte & Marin

RIFLESSO SP G



RIFLESSO SP G

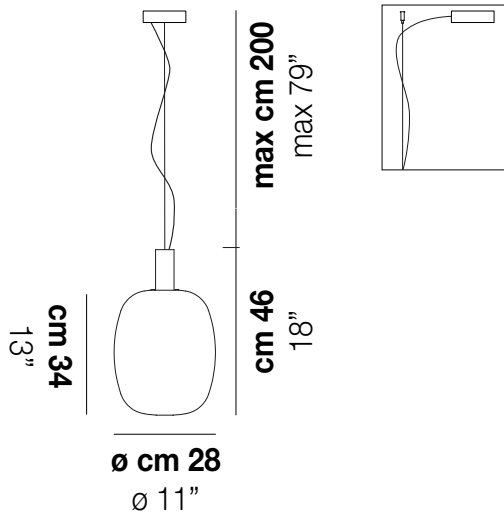

DATOS TÉCNICOS:



LED 2700K DIM2	1x12,5W	220-240 V 50/60 Hz
LED 2700K DIM3	1x12,5W	220-240 V 50/60 Hz
LED 3000K DIM2	1x12,5W	220-240 V 50/60 Hz
LED 3000K DIM3	1x12,5W	220-240 V 50/60 Hz

CERTIFICATIONS:



Led 2700 K 12,5 W 35 V 1150 lm DIM2 Phase Cut
Led 2700 K 12,5 W 35 V 1150 lm DIM3 0-10V, Push
Led 3000 K 12,5 W 35 V 1150 lm DIM2 Phase Cut
Led 3000 K 12,5 W 35 V 1150 lm DIM3 0-10V, Push

VOLUME	Mc 0,1
PESO BRUTO	Kg 6,5
PESO NETO	Kg 4,5

download



ACABADO DEL DIFUSOR




AMTR

CRTR

FUTR

ACABADO PARTES METÁLICAS




BKS

RAV

OTRAS VERSIONES DISPONIBLES

Haga clic en la versión para ir a la versión web del producto

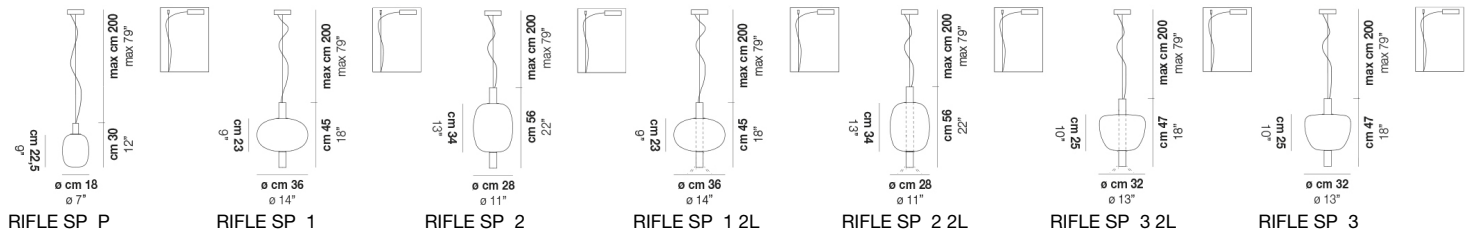

RIFLE SP P

RIFLE SP 1

RIFLE SP 2

RIFLE SP 1 2L

RIFLE SP 2 2L

RIFLE SP 3 2L

RIFLE SP 3